

## **55-inch hanging double-sided poster screen specification**


### **book-ultra-thin Android version**

#### **1. product features**

HBM-55EG6 Vertical double-sided poster screen is our new ultra-thin all-in-one machine products. The product features are described as follows:

1. Market mainstream professional Android Android scheme design, good heat dissipation, stable performance, simple maintenance.
2. Bright screen, 1080P HD resolution, ultra-wide perspective LCD panel, to avoid the perspective blind area of ordinary similar products on the market, and further improve the display effect.
3. The product uses ultra-narrow frame, ultra-thin body, the whole machine thickness is only 20mm;
4. The double-sided screen synchronous display screen, customers can receive the visual impact of the video and pictures brought by the information release at the same time, to increase the attraction and publicity of mobile customers and potential customers;
5. Abandon the traditional poster replacement trouble, no video, monotonous pictures of the traditional passive reception of publicity, bring more intense publicity effect;
6. Network cable and power cable concealed wiring design, the overall appearance effect is better;
7. In the system design, adhering to the stability of the signage series products and advanced, to give customers as always management experience.

## 2. product appearance

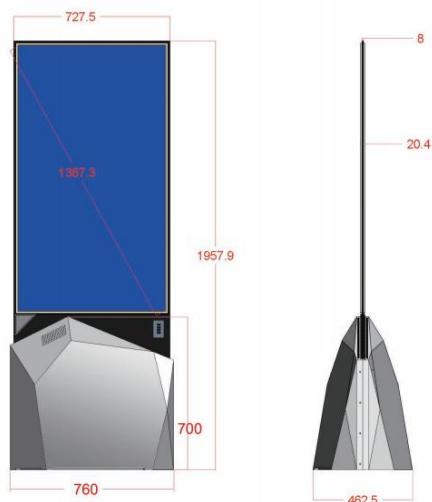

|    |                                                                                                                                           |
|----|-------------------------------------------------------------------------------------------------------------------------------------------|
| 1. | The company is independent of these external appearance, has applied for the appearance patent                                            |
| 2. | All-aluminum backplane is used for self-cooling, and the three sides of the fuselage (left / right / below) are open for heat dissipation |
| 3. | Complete machine: length 905mm width 500mm height 2042mm                                                                                  |
| 4. | Bottom extension of USB * 2, infrared remote control * 1 power interface                                                                  |

| Display screen main indicators |                                                                                                                   |
|--------------------------------|-------------------------------------------------------------------------------------------------------------------|
| The highest resolution         | 19201080 is displayed line by line                                                                                |
| Perspective (CR> 10)           | 178 (horizontal); 178 (vertical)                                                                                  |
| pigment                        | 16.7M Colour                                                                                                      |
| luminance                      | Conventional brightness screen 23 sides> 430 cd / m2<br>Specific highlighting A> 430 cd/m2 B> 700 cd / m2 (price) |
| contrast ratio                 | > 1400: 1                                                                                                         |
| Signal response time           | < 8ms                                                                                                             |
| Visual area                    | 680.4(H ) × 1209(V )                                                                                              |
| Backlit form                   | LED                                                                                                               |
| LCD panel screen brand         | LG                                                                                                                |
| Backlight life                 | For> 50,000 hours                                                                                                 |
| Android configuration          |                                                                                                                   |
| CPU                            | Android quad-core at 1.8GHz and above                                                                             |
| GPU                            | GPU Mail-T764                                                                                                     |

|                                                     |                                                                                                                                                                                                                                                                              |
|-----------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| internal storage RAM                                | 2G (optional 2G)                                                                                                                                                                                                                                                             |
| memory ROM                                          | 16G (3 optional 32 G)                                                                                                                                                                                                                                                        |
| External extended storage                           | TF card (maximum support up to 128G)                                                                                                                                                                                                                                         |
| peripheral interface                                | USB×2 、 R J45×1                                                                                                                                                                                                                                                              |
| Ethernet                                            | Support for 10 / 100M                                                                                                                                                                                                                                                        |
| Wifi                                                | Supports wifi 802.11 b / g / n 2.4GHz                                                                                                                                                                                                                                        |
| telecontroller                                      | Support infrared remote control                                                                                                                                                                                                                                              |
|                                                     |                                                                                                                                                                                                                                                                              |
| <b>software configuration</b>                       |                                                                                                                                                                                                                                                                              |
| operating system                                    | Android 13.0                                                                                                                                                                                                                                                                 |
| basic software                                      | Web browsing, web chat, email, ebook, resource manager, clock, alarm clock, calculator, recording, etc                                                                                                                                                                       |
| functional characteristics                          | Remote software controls the timing switching machine                                                                                                                                                                                                                        |
|                                                     | Dual screen display, inside and outside the screen can respectively play different content                                                                                                                                                                                   |
|                                                     | Dual screen separate control, the internal and external screen can define the timing switch of different periods, such as the inner screen can be shut down at 18:00 after work, the outer screen can still be played externally, if it can be set to 21:00 timing shutdown. |
|                                                     | Real-time remote monitoring, 7 * 24 hours unattended                                                                                                                                                                                                                         |
|                                                     | Support for landscape screen, portrait screen automatic configuration                                                                                                                                                                                                        |
|                                                     | Support for wireless screen projection (optional)                                                                                                                                                                                                                            |
|                                                     | Support remote upgrade                                                                                                                                                                                                                                                       |
|                                                     |                                                                                                                                                                                                                                                                              |
| <b>functional parameter</b>                         |                                                                                                                                                                                                                                                                              |
| Supported video formats:                            | Support for AVI (H.264、DIVX、XVID) , rm, rmvb, MKV (H.264、DIVX、DIVX、XVID), WMV, MOV, MP4 (H.264、MPEG、DIVX、XVID) , FLV (H.263, H.264), TS, 3GP, MPG, and many other formats                                                                                                    |
| Supported image formats:                            | BMP, JPEG, PNG, GIF and other conventional formats                                                                                                                                                                                                                           |
| Support for audio formats:                          | MP3, WAV, WMA, AAC and 3GP                                                                                                                                                                                                                                                   |
| volume                                              | The management platform is adjustable                                                                                                                                                                                                                                        |
| Automatic timing on and off                         | support                                                                                                                                                                                                                                                                      |
| Play mode                                           | Cycle playback, slot, timing, timing and other playback modes                                                                                                                                                                                                                |
|                                                     |                                                                                                                                                                                                                                                                              |
| <b>Electrical indicators and product dimensions</b> |                                                                                                                                                                                                                                                                              |
| Power specifications                                | Input voltage range: AC100V to 240V                                                                                                                                                                                                                                          |
| The horn power                                      | 5W×2                                                                                                                                                                                                                                                                         |
| maximum power dissipation                           | ≤250W                                                                                                                                                                                                                                                                        |
| Standby power consumption                           | ≤1W                                                                                                                                                                                                                                                                          |

|                             |                                        |
|-----------------------------|----------------------------------------|
| working temperature         | 0℃～40℃                                 |
| Working humidity            | 10% to 90%, with no condensation       |
| Storage temperature         | -20℃～60℃                               |
| Appearance size             | Length 905mm width 520mm height 2068mm |
| way to install              | Vertical screen landing                |
| Complete machine net weight | 55KG                                   |
|                             |                                        |
| appendix                    |                                        |
| instructions                | A set of oneself                       |
| Remote control / battery    | A set of oneself                       |
| Wifi antenna                | 1 Endyiceps root                       |
| power line                  | 1 Endyiceps root                       |
| Lifting accessories         | A set of oneself                       |

product appearance



## Software description:

### Software description:

Plain material delete, renamed, preview of the function material upload, new folder, copy, paste, copy, delete, search, drag the material to the folder and other functions

Support for different material types (picture, background, video, music, word, excel, ppt, PDF, web page, streaming, apk, button)

Template import / export, all / cancel all, single / multiple, share / cancel share function

Production page:

The setting function of template screening, template search and template production popup in the program production page

---

Program scene:

1. Add, delete, copy, and scene length setting functions of the main scene

1. Functions of sub-scene addition, deletion, copy, and scene duration setting

Add jump:

1. Add the function of jump to picture, video, scene, web page jump, jump back time

Set the jump (touch):

1. Set the function of jump, including the addition, delete, replacement, drag and other functions

2. The functions of the previous, next, home page, add, delete, edit, close, double-click exit, swipe left and right, turn left and right, turn left and right, slide up and down, and so on

Set up the jump:

1. Set the function of jump, including the addition, delete, replacement, drag and other functions

2. The functions of the previous, next, home page, add, delete, edit, close, double-click exit, swipe left and right, turn left and right, turn left and right, slide up and down, and so on

Box selection alignment:

Box selection function of left alignment, horizontal center, upper alignment, right alignment, vertical center, bottom alignment, horizontal distribution, and vertical distribution

Control right-click property:

1. Control delete jump, add jump, copy, paste, spread full, delete, put the top layer, put the bottom layer, the last layer, the next layer function

2. Right-click attributes of control elements including text, pictures, video, music, word, excel, ppt, PDF, mix, weather, date, countdown, web page, streaming media, exchange rate dynamics, stock dynamics, apk, signal source and so on

Release Settings:

1. Control and broadcast priority function of ordinary programs, interrupted programs, exclusive programs and gasket programs

2. Functions of program broadcast date, terminal selection, saving, submission and release

3. Mechanism tree, selection, search and condition filtering of the device selection interface

Program search, sort, edit, release, delete, view details, preview, paging and other functions, in the editing, can repeat the content of the program production 3.1-3.10

Release progress statistics of the pop-up interface

Specifies the terminal to delete programs

In the production play plan page, the plan name of the play plan, the setting of the play date, the program addition (including the program search, paging, sorting, preview, selection, etc.), the addition of the play time period, the drag, save, the next step, etc

Features of the message save, next step, message name, message type, message content, message type, message type, playback speed, start time, end time, font size, font color, background color, background transparency

Search, searching, sorting, editing, publishing, deleting, viewing details, preview, paging and other functions

On the pending review page, the message search, sorting, audit, paging, list display function

On the audited page, message search, sorting, details, paging, list display function

---